

Da Recessed Trim

Installation Instructions

PLEASE READ THESE INSTRUCTIONS PRIOR TO INSTALLING THIS PRODUCT

1. Disconnect electrical power from lighting circuit before installation.
2. CAUTION-RISK OF FIRE. This product must be installed in accordance with the applicable NEC/local installation code by a person familiar with the construction and operation of the product and the hazards involved.
3. Make sure LED drivers, LED Modules and all other fixture components are present.
4. This installation assumes Class 2 two conductor wires have been run from fixture mount location to LED driver enclosure location.

5. LED driver enclosure must be installed in an accessible, dry and well ventilated location, using the screw holes provided in enclosure.

6. Make wire connection from LED driver to two conductor Class 2 wire, running in ceiling with wire nuts (not included).


7. Cut-out the opening in ceiling for inserting frame as per table below.

8. Initially the frame support bracket is parallel to frame. To insert frame into Cut-out, rotate bracket 90° so it does not interfere with insertion.

9. Insert fixture frame into ceiling opening so that only flange is seen at surface.


Module	Drywall Cutout
1'	16-1/8" x 3-1/2"
2'	27-3/8" x 3-1/2"
3'	38-5/8" x 3-1/2"
4'	49-5/8" x 3-1/2"

10. Rotate frame support bracket 90°, so it slides down over frame. Tighten bracket screw until frame support bracket has secured frame in ceiling opening. Do not over-tighten bracket as it may damage the fixture frame.

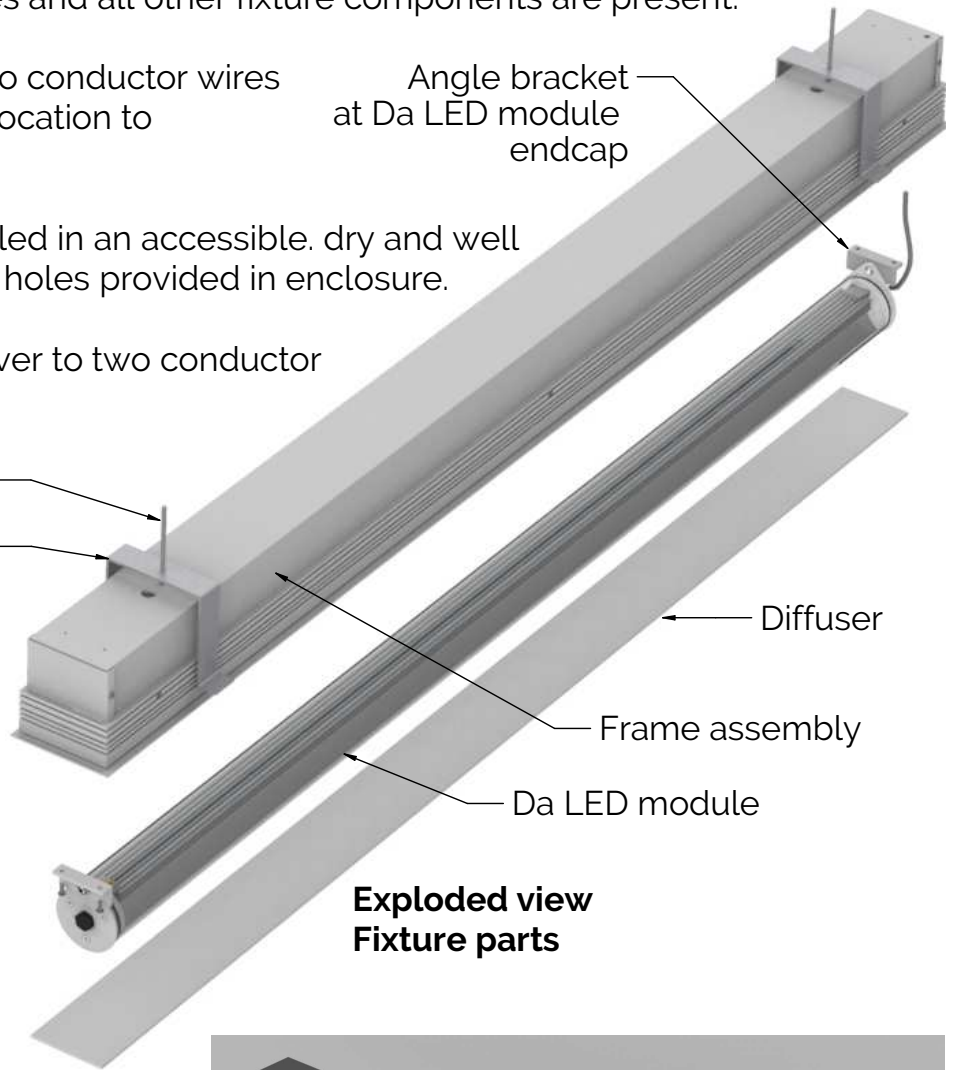




Brackets rotated for frame insertion

Frame assembly

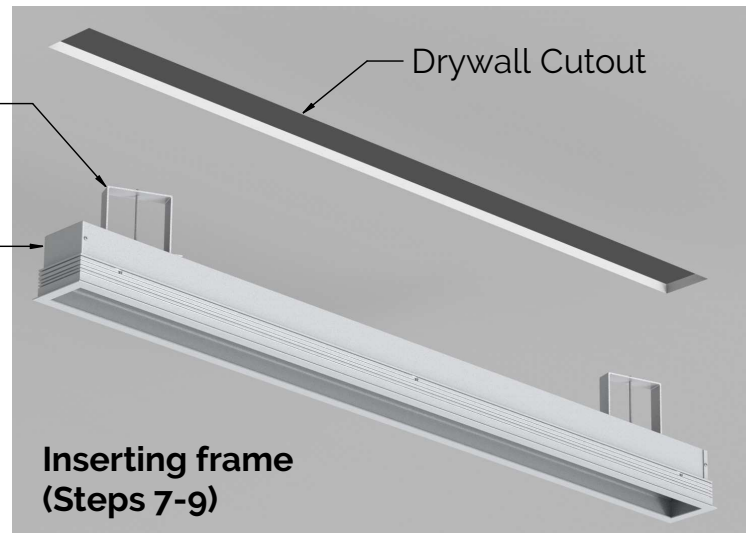


Da Recessed Trim

Installation Instructions

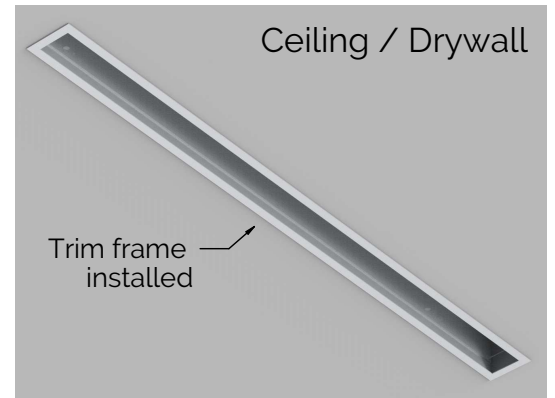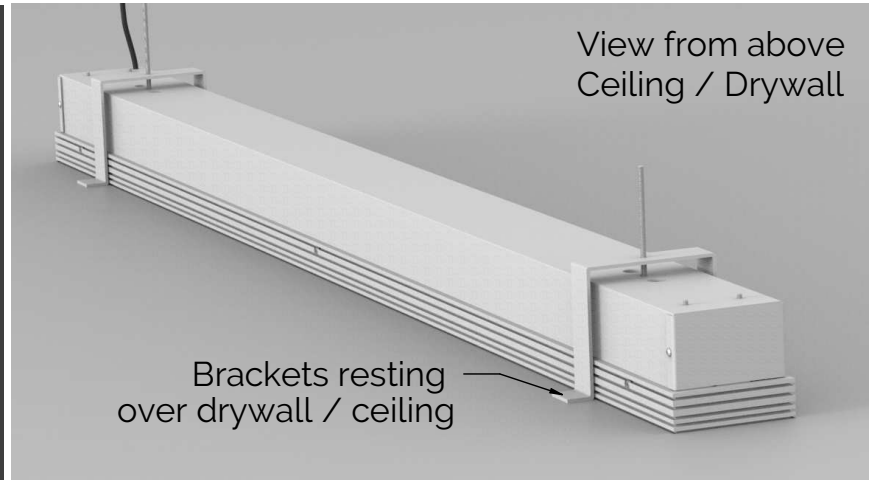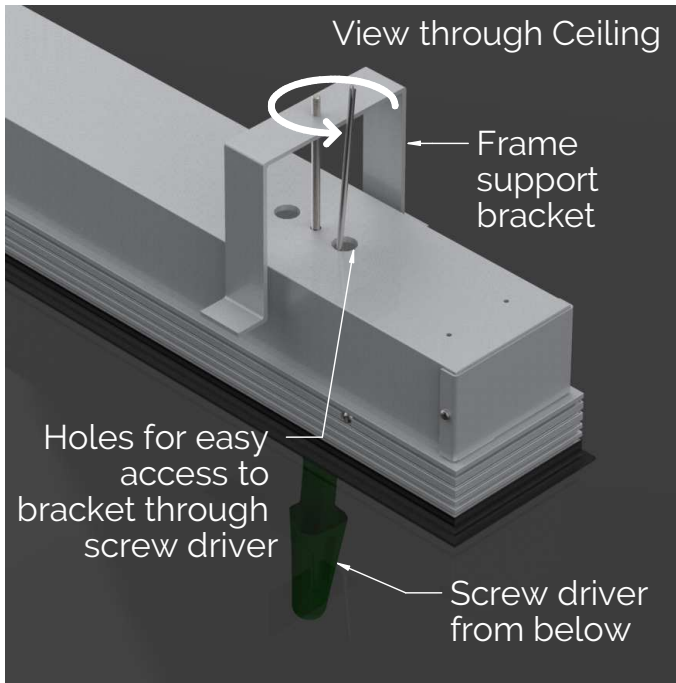

Inserting frame (Step 10)

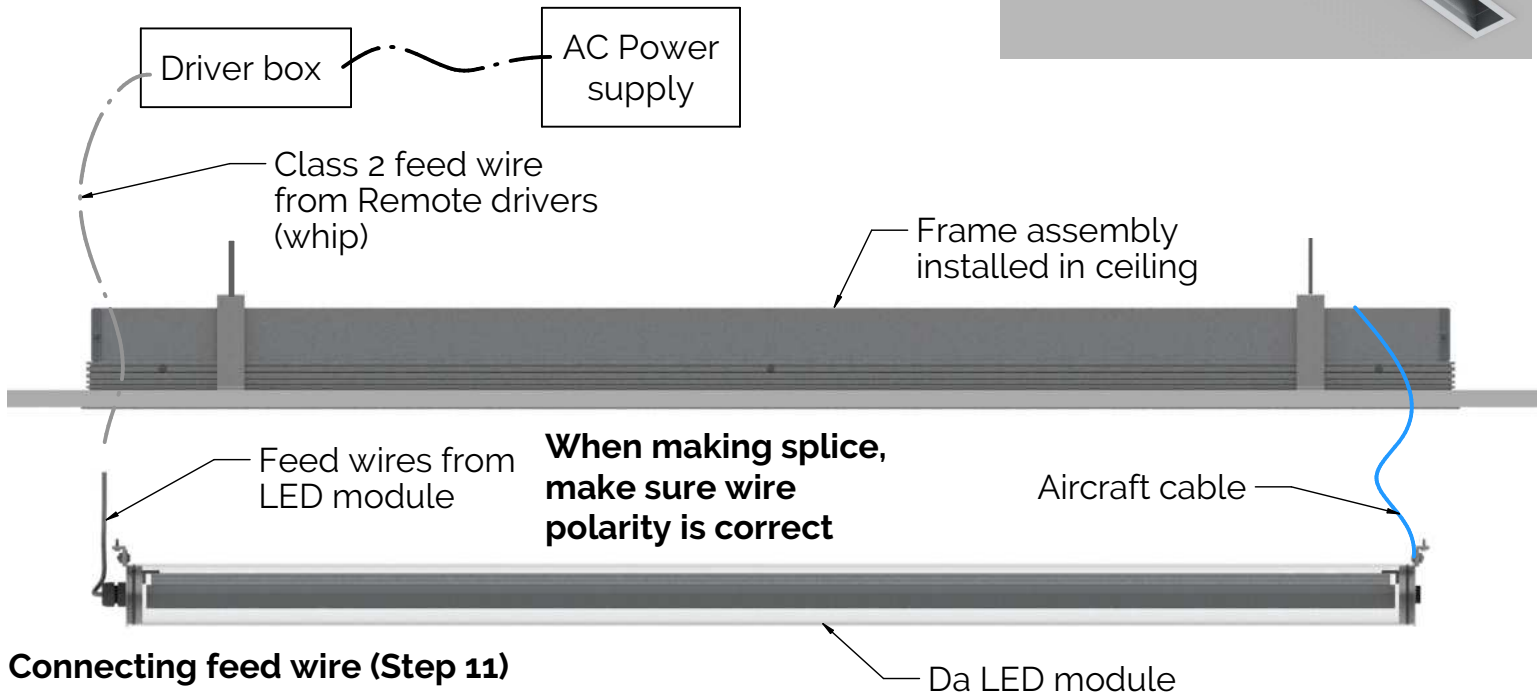


Connecting feed wire (Step 11)


11. Connect LED module to Remote drivers (whip). Make sure LED module is attached to Fixture frame with included safety cable (aircraft cable) to avoid damage or injury.
12. Insert Da LED module into frame completely and secure it to frame by screwing angle bracket attached to Da LED module endcaps to frame top U-channel using two corrosion resistant #6-32 x 3/8" pan head screws at both ends.

Da Recessed Trim

Installation Instructions

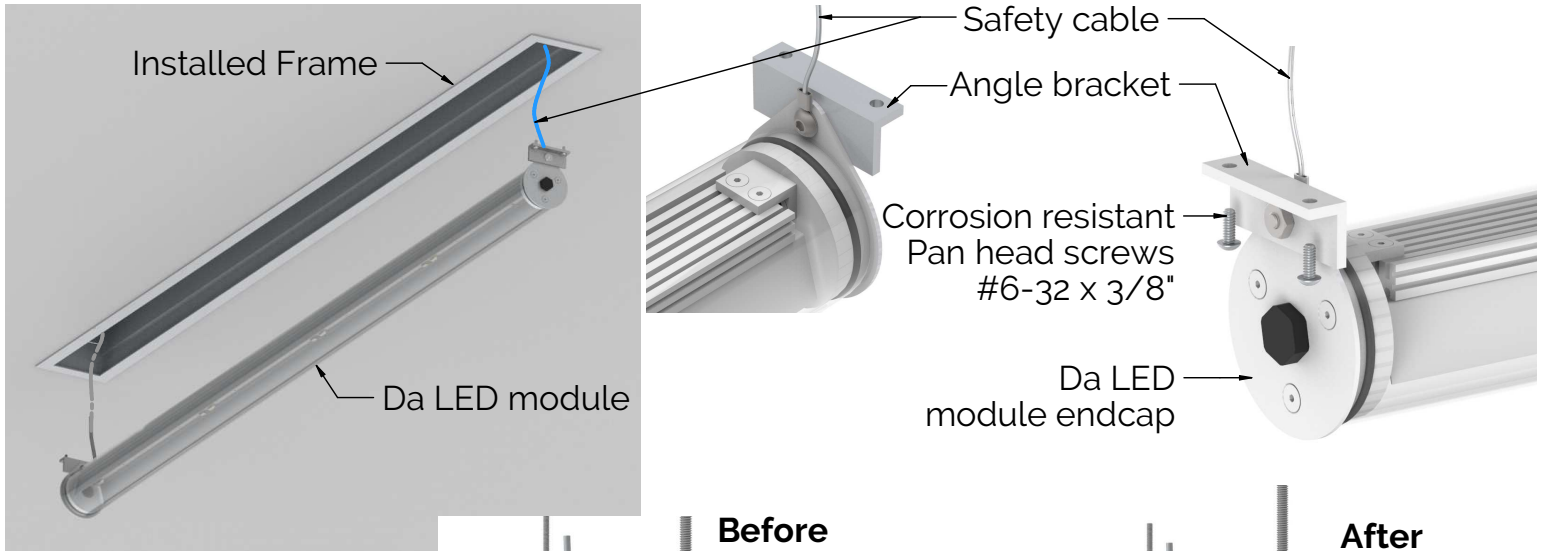


Inserting Da LED module (Step 12)

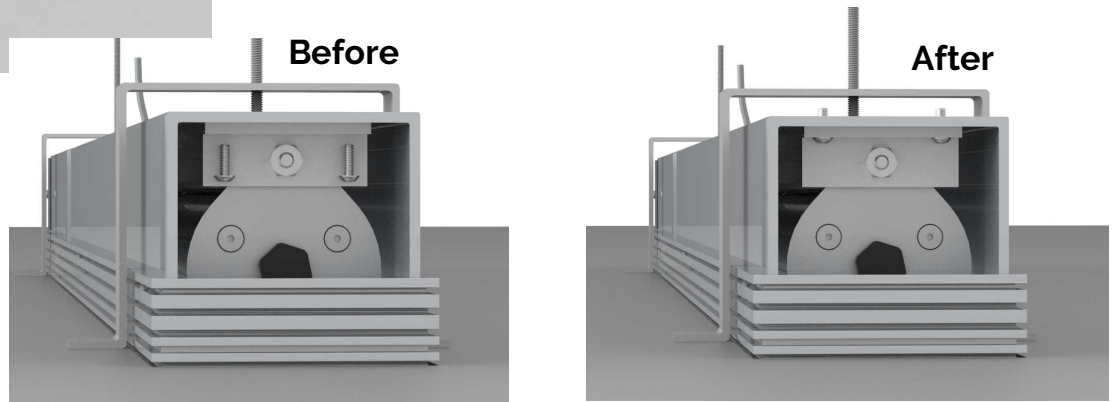



View shown without frame end cover for graphical purpose

13. Make sure fixture is well secured to ceiling and there are no pinched or exposed wires.
14. Insert the diffuser into the frame by tilting it and sliding it over inner trim frame flange.

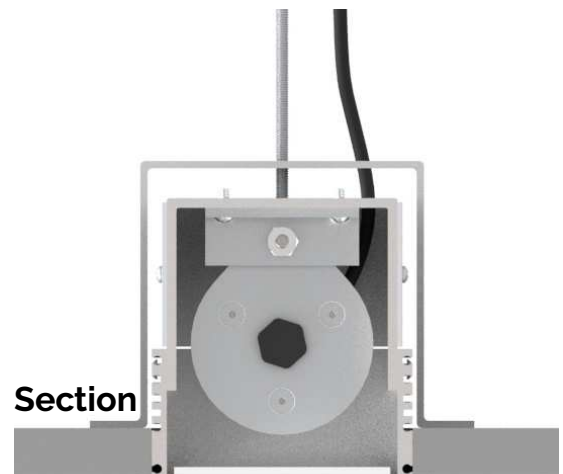

Da Recessed Trim

Installation Instructions

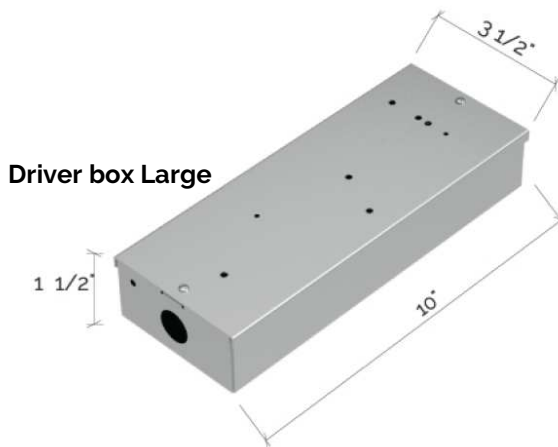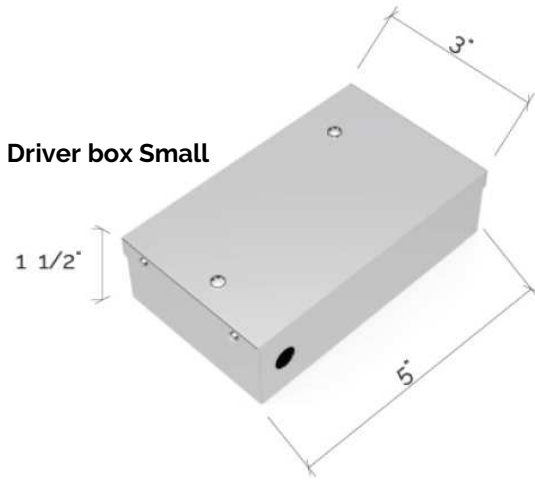

15. Make Mains power connection to LED driver using provided connector inside driver enclosure. Make sure Mains power Ground wire is secured to green ground wire inside driver enclosure.

16. Restore Main power.

