
# Da Round Pendant Trio

Da / Outdoor





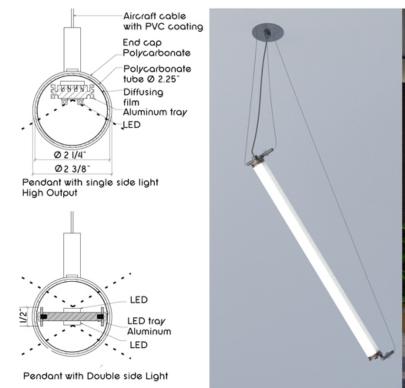

archlit reserves the right to make changes without prior notice. (02.25.2022)

Lighting Fixture in an enclosure and end caps black in polycarbonate and LED tray in aluminum, O ring at extremities for waterproofing. A diffusing film is included for even illumination from the LED boards. Wet Location listed. UV Stabilized Polycarbonate formulation. Dimmable 0-10V. Individual mounting and runs can be achieved, sharing mounting canopies. Fixtures are individually adjustable. CRI 90+. Lengths in 1', 2', 3', and 4'. Drivers are remote at max 100' distance.

IP66 K rated

## DaTrio

## Da round Pendant Trio

#### Lumen Output

27 HO - 2700 K 12.5 w/f 910 lumens/f 30HO - 3000 K 12.5 w/f 980 lumens/f 35HO - 3500 K 12.5 w/f 1010 lumens/f

 $27 - 2700 \text{ K } 5\text{w/f } 410 \text{ Lumens/f} \\ 30 - 3000 \text{ K } 5 \text{ w/f } 425 \text{ Lumens/f}$ 

## Lighting module

A - 1' nominal module

B - 2' nominal module

C - 3' nominal module

D - 4' nominal module

## Finish

WH - White

BK - Black

Cu - Custom Color

Specify RAL color

End caps, hardware, valves and liquid tight devices are black

## Output direction

Std - No Reflector 120 degree LED

Sym - Symmetrical 36 degrees

Ds - Double sided

Only for std output 5w/f. Only std distribution

#### Dimming

O - Non Dimmable 120v

1 - Non Dimmable 277v

4 - Dimmable 0-10v (4wires, 120 or 277 v)

Enclosure for dimmers provided as they are remote. Suitable for damp location. In case of using special boxes for outdoor locations (by others) use archlit boxes in the boxes for splices

## Suspension aircraft cablet

36 - 36" max

100 - 100'' max

LCu - Custom Length

Specify LCu xx"





#### Notes:

Drivers are remote at 80' max.

CRI more than 90

McAdam 3 bin

Location of drivers in a cluster with access recommended for easier dimmer and power connections. When 0-10v system is used, 2 wires for longer runs to fixtures from cluster is required (instead of 5 wires) for easier installation



