


Da Line Pendant

Da / Outdoor

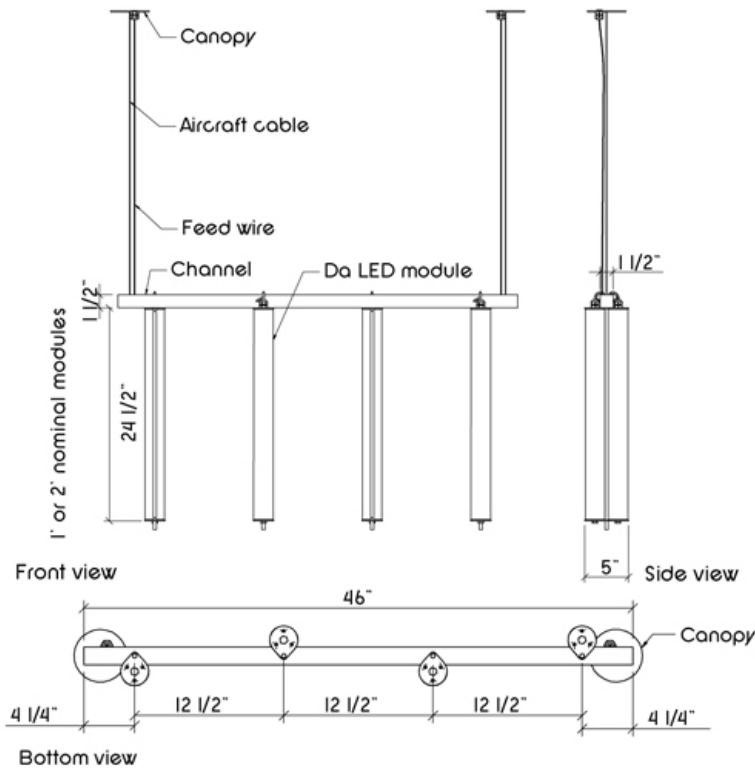

archlit reserves the right to make changes without prior notice. (02.25.2022)

Da Linear Pendant is an outdoor lighting fixture with lighting modules with end caps in black polycarbonate, tube in polycarbonate of 2 1/4" diam with UV protection and diffuser film. A channel in aluminum of 1 1/2" is pending from aircraft cable covered on PVC.

Lighting modules in 1' and 2' nominal sizes. wet location

Design by Gaspar Glusberg

IP66 K

DaliPe

Da Line Pendant

Output

27 - 2700 K 11 w / f 390 lumens per foot per side

30 - 3000 K 11 w / f 390 lumens per foot per side

40 - 4000 K 11 w / f 390 lumens per foot per side

All double sided lighting

Finish

WH - White

BK - Black

Specify RA - Custom

End caps, hardware, valves and liquid tight devices are black

Dimming Options

O - Non Dimmable 120v

1 - Non Dimmable 277v

4 - Dimmable 0-10v (4wires, 120 or 277 v)

Lighting Length

A - 1' nominal lighting modules

B - 2' nominal lighting modules

Drivers location

Dd - Damp location

Box by archlit

Do - Outdoor

locate in box (by others) at max 100' Polycase ML-70F*1.508 or similar recommended

Suspension aircraft cable

36 - 36" max

100 - 100" max

Lcu - Custom Length

Specify LCu xx"

Covered in PVC



Da Line Pendant

Da / Outdoor

Emergency

00 - No Emergency

EM - Emergency

Only for drivers and packs at damp location
max distance to emergency packs 30'

Emergency max to 4 feet of LED boards



Notes:

Drivers are remote max 80'

CRI more than 90


McAdam 3 bin

Location of drivers in a cluster with access recommended for easier dimmer and power connections. When 0-10v system is used, 2 wires for longer runs to fixtures from cluster is required (instead of 5 wires) for easier installation

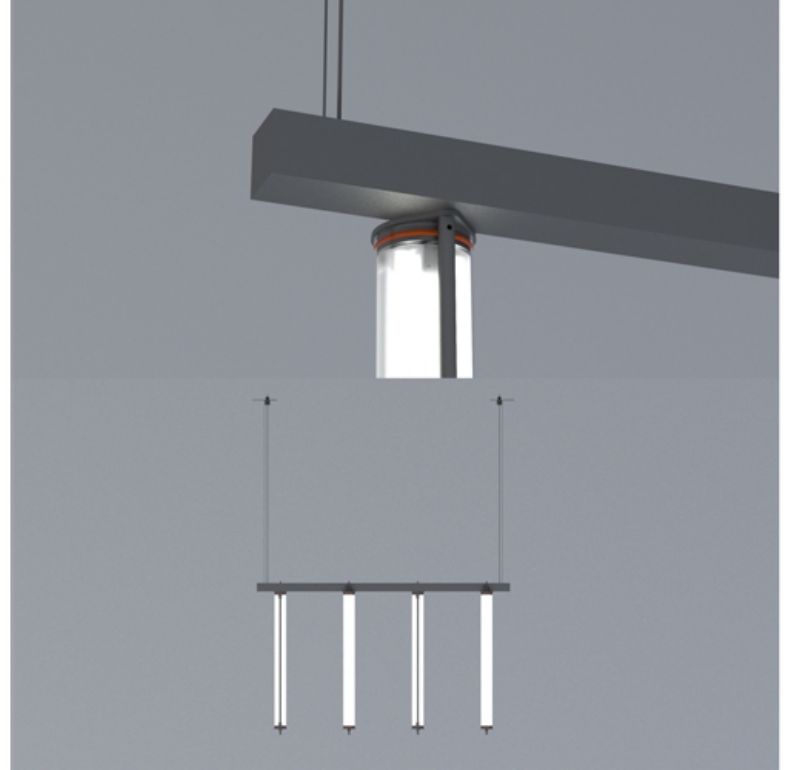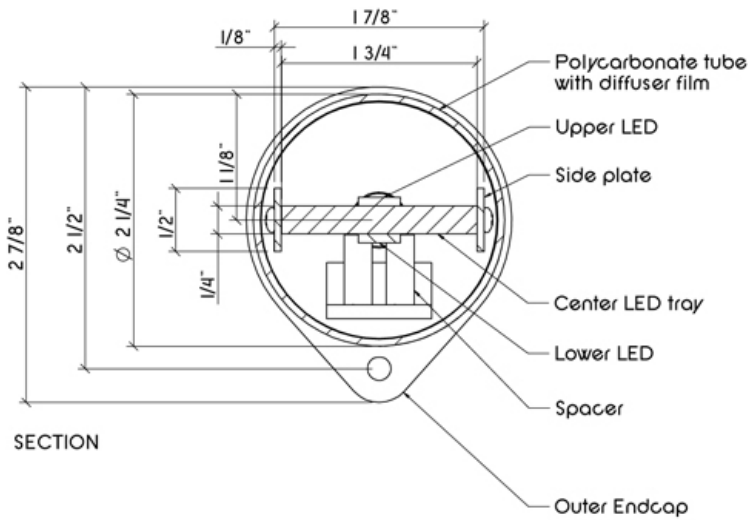

Da Line Pendant

Da / Outdoor

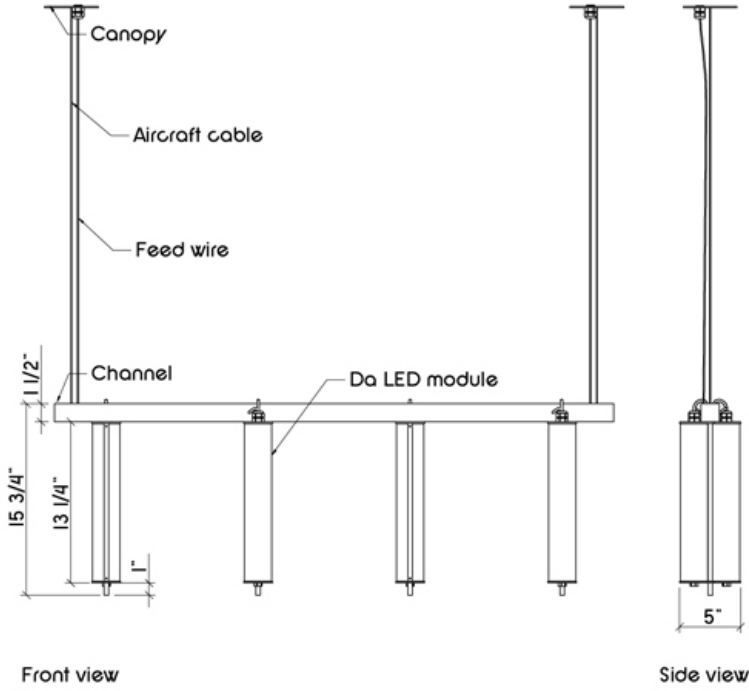

Driver Boxes

