


Da Round Pendant Horizontal

Da / Outdoor

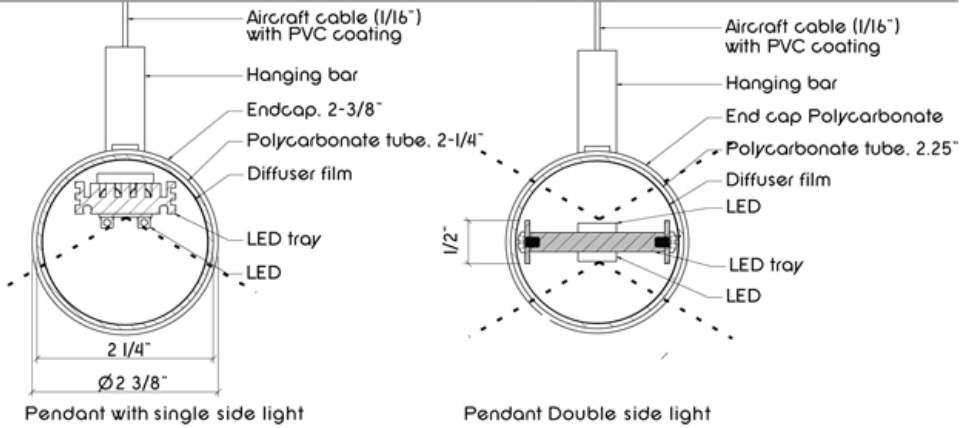

archlit reserves the right to make changes without prior notice. (02.25.2022)

Pendant Lighting Fixture horizontally mounted with a horizontal lighting component for outdoors in an enclosure and end caps black in polycarbonate, and LED tray in aluminum, O ring at extremities seals the lighting components from water. A diffusing film is included for even illumination from the LED source. UV Stabilized Polycarbonate formulation. Dimmable 0-10V. Individual mounting and runs can be achieved, sharing mounting canopies. Fixtures are individually adjustable. Symmetrical or asymmetrical distribution available. Remote drivers.

IP66K rated

DarPh

Da round Pendant horizontal

Lumen Output

- 27 HO - 2700 K 12.5 w/f 910 Lumens/f
- 30HO - 3000 K 12.5 w/f 980 Lumens/f
- 35HO - 3500 K 12.5 w/f 1010 Lumens/f
- 27 - 2700 K 5.5 w/f 384 Lumens/f
- 30 - 3000 K 5.5 w/f 384 Lumens/f
- 40 - 4000 K 384 lumens /f 4.9 w/f

Finish

- WH - White
Only End stem and canopy
- BK - Black
Only end Stem and canopy
- Cu - Custom Color
Only end Stem and canopy Specify RAL color
End caps, hardware, valves and liquid tight devices are black

Dimming

- O - Non Dimmable 120v
 - 1 - Non Dimmable 277v
 - 4 - Dimmable 0-10v (4wires, 120 or 277 v)
- Enclosure for dimmers provided as they are remote. Suitable for damp location. In case of using special boxes for outdoor locations (by others) use archlit boxes in the boxes for splices



Runs

A - 1' nominal module

Dimension at center line of canopy (J Box)

B - 2' nominal module

Dimension at center line of canopy (J Box)

C - 3' nominal module

Dimension at center line of canopy (J Box)

D - 4' nominal module

Dimension at center line of canopy (J Box)

Total Run: (0 ft 0 in)

Output direction

Dn - Down

DoAs - Down Assymetrical

DoSym - Down Symmetrical 36 degrees

Up - Up

UpAs - Up Assymetrical

Up Sym - Up Symmetrical

Ds - Double sided

Only for std output 5.5 w/f. Only std distribution. Assume 11 w/f with both sides Criteria from fixture installed on horizontal plane with canopies on top

Using asymmetrical in runs, specify qty. of each in product code. Good for estimates. Provide schemes /drawings to clarify asymmetrical side. archlit will generate submittals Specify qty of each per run

Suspension aircraft cable

36 - 36" max

100 - 100" max

LCu - Custom Length

Specify LCu xx"

Emergency

OO - No Emergency

EM - Emergency

Emergency in a run, specify qty of packs. Box for emergency outdoors installed (by others) We suggest for one emergency pack and driver Polycase SB- 46-02 (1 driver and 1 emergency pack) (by others

Notes:

Drivers are remote at 80' max.






CRI >90

McAdam 3 bin

Location of drivers in a cluster with access recommended for easier dimmer and power connections. When 0-10v system is used, 2 wires for longer runs to fixtures from cluster is required (instead of 5 wires) for easier installation

Light Distribution

Downlight pendant

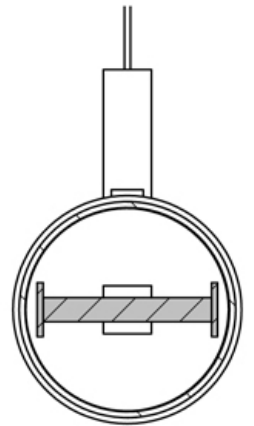



No reflector

Asymetrical reflector -

Symmetrical refector

Uplight pendant



No reflector



Asymetrical reflector -

Symmetrical refector


Down and Up light

Da Round Pendant Horizontal

Da / Outdoor

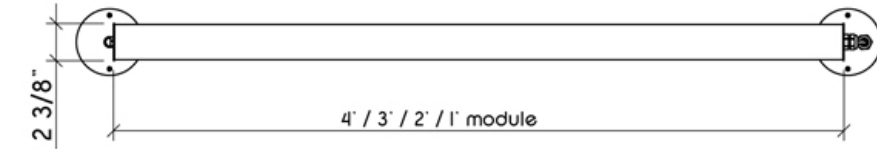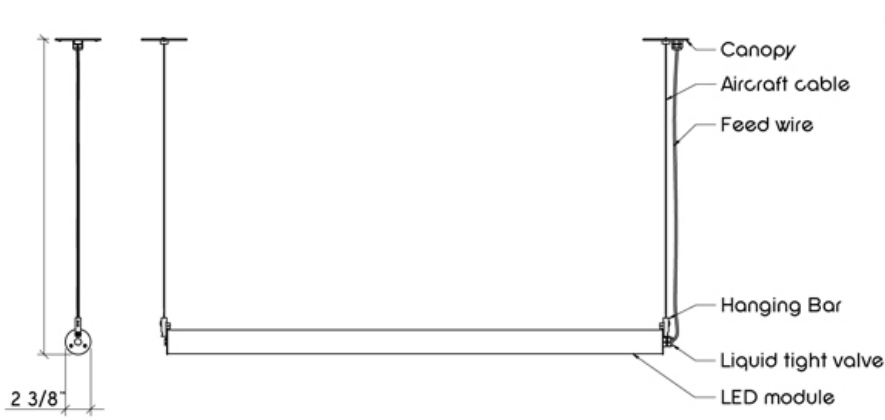

Bottom view

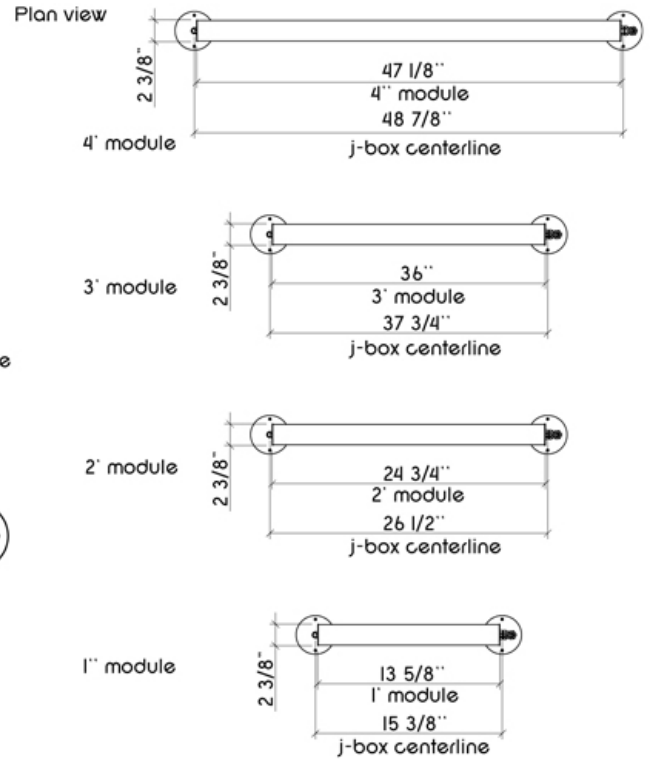



Driver Boxes

