
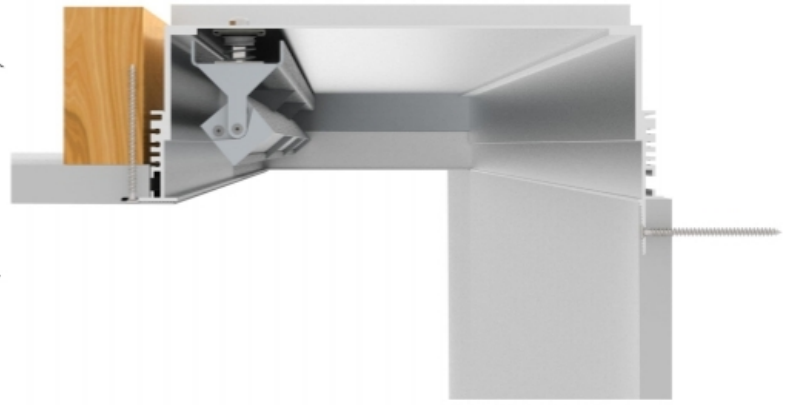


LeeSti Legato Ceiling Adjust Trimless

LeeSti / Recessed

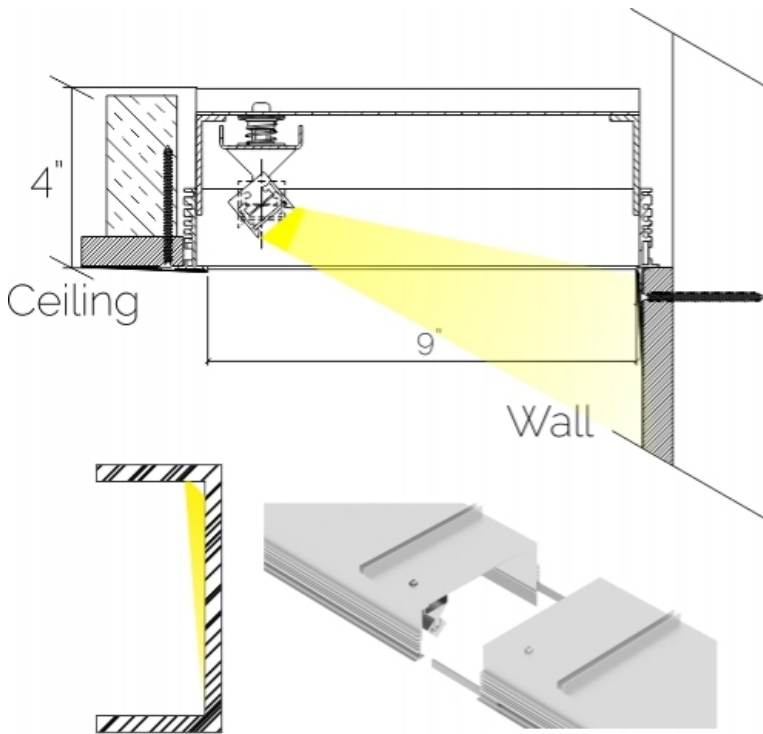

archlit reserves the right to make changes without prior notice. (08.12.2016)

LLECAT

LeeSti Legato Ceiling Adjustable Trimless

Lumen Output

3017 - 3000 K 1200 lumens / ft 12 w /ft WH - White
O - Non dimmable 120v

3014 - 3000 K 1000 lumens / ft 10 w /ft BK - Black
1 - Non dimmable 277v

3011 - 3000 K 780 lumens / ft 7.5 w /ft CU - Custom Color
4 - Dimmable 0-10v (4wires, 120 or 277 v)

3008 - 3000 K 560 lumens / ft 5.5w /ft Specify RAL color

3005 - 3000 K 350 lumens / ft 3.1 w /ft

3517 - 3500 K 1200 lumens / ft 12 w /ft

3514 - 3500 K 1000 lumens / ft 10 w /ft

3511 - 3500 K 780 lumens / ft 7.5 w /ft

3508 - 3500 K 560 lumens / ft 5.5w /ft

3505 - 3500 K 350 lumens / ft 3.1 w /ft

WhTu - White tuning 2700K @ 1050 lumens/foot

and 6500k @1200 lumens/foot 12.5 watt/foot

All Uplight versions with light will have a transparent diffuser

Use of programmable drivers allow different outputs (lumen output and load) to fix color temperature versions

Finish

WH - White

BK - Black

CU - Custom Color

Specify RAL color

Dimming Options

O - Non Dimmable 120v

1 - Non Dimmable 277v

4 - Dimmable 0-10v (4wires, 120-277 v)

Dimmable TRIAC (2 wires, max 25w, 120v) requires more drivers if run is bigger than 2'

A 4' will need (2) feeds, (2) TRIAC drivers



LeeSti Legato Ceiling Adjust Trimless

LeeSti / Recessed

Runs

A - 1' nominal module 12.5w 12 1/2"

B - 2' module 25w 23 1/2"

D - 4' module 50w 46" nominal

Total Run: (0 ft 0 in)

Distance between lighting modules 1/8"

Emergency

00 - No Emergency

EM - Emergency module max 22"


Emergency packs for 22 inch board

Notes:


Drivers Remote. Max distance to drivers 100'

Runs with 1', 2' and 4' modules

Remote Drivers

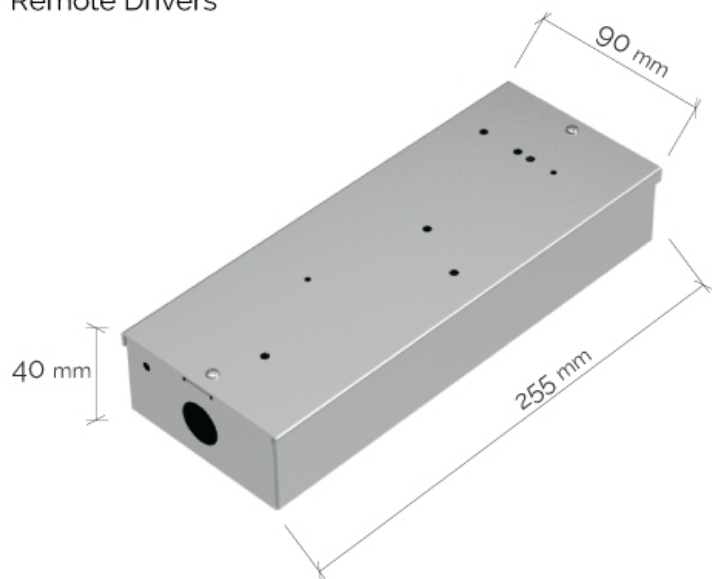

Driver Box for Dimm 0-10v
NTS

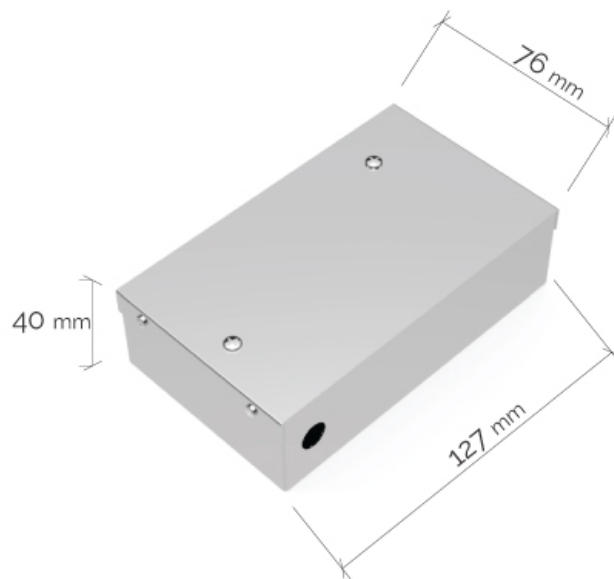

Driver Box Non Dimm and TRIAC drivers
NTS

