







archlit reserves the right to make changes without prior notice. (01.11.2016)

Minuet is a series of square trimless recessed downlights in aluminum injection. A frame in polycarbonate is flush with ceiling and the diffuser (special for LED sources), will become part of the ceiling. No tooling for servicing the fixture from below . Drivers are remote at a max distance of 100 feet. The standard option for the diffuser is flood illumination, special optics with clear polycarbonate with different aperture reflectors can be specified. In case of service of the lighting modules, they can be removed with no tooling. Drivers are class 2 remote. Dimmable and non dimmable, in 2700 K and 3000K. Once installed in the IC housing, the square can be aligned and fixed in a position by tightening one screw. Damp location certified

### Min<sub>2.5</sub>

# Minuet Downlight Trimless

## **Lumen Output**

14 - 1450 lumens 2700K 13W 15 - 1520 lumens 3000K 13W

Housing NC - New Construction

30 - 30 degree Beam IC - IC Housing

# **Optics**

**Finish** 

WH - White

CU - Custom Specify RAL color

BK - Black

41 - 41 degree Beam D - Frosted diffuser

### **Dimming**

O - Non Dimmable 120v

1 - Non Dimmable 277v

2 - Dim TRIAC 120v

3 - Dim TRIAC 277V

4 - Dimmable 0-10v (4wires, 120/277 v)


### **Emergency**


00 - No Emergency


EM - Emergency

### Notes:


Drivers are remote Max distance to drivers 100' Damp location certified

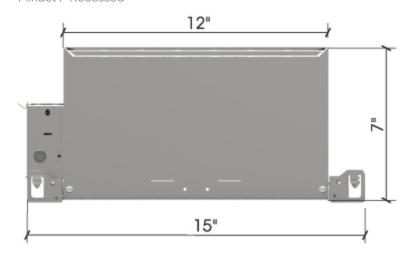




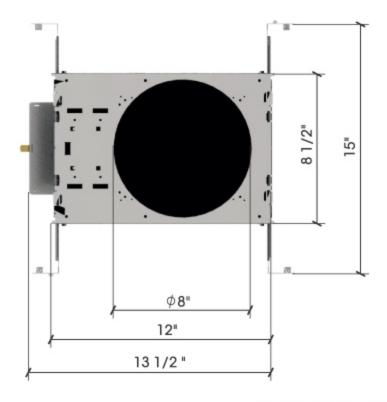








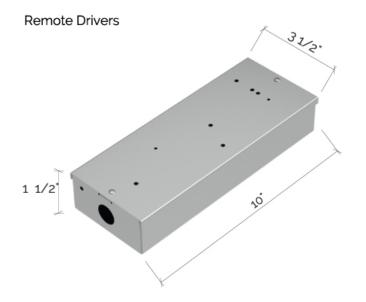



Driver Box for Dimm 0-10v NTS

Driver Box Non Dimm and TRIAC drivers NTS