

Naive Diffuser film



archlit reserves the right to make changes without prior notice. (08.11.2020)

Naive Duet, extruded aluminum minimal design lighting fixture with remote drivers (max distance 80'). For Ceiling or Wall Adjustable, rotates in the longitudinal axis. Arms can have different lengths. Special blocking required for wall installations.

Diffuser with film, even line of light (the dots generated by the LED source are not seen) and parabolic louver as options.

NaD

Naive Duet

Lumen Output

- 3017 - 3000 K 1200 lumens / ft 12 w /ft
- 3014 - 3000 K 1000 lumens / ft 10 w /ft
- 3011 - 3000 K 780 lumens / ft 7.5 w /ft
- 3008 - 3000 K 560 lumens / ft 5.5w /ft
- 3005 - 3000 K 350 lumens / ft 3.1 w /ft
- 3517 - 3500 K 1200 lumens / ft 12 w /ft
- 3514 - 3500 K 1000 lumens / ft 10 w /ft
- 3511 - 3500 K 780 lumens / ft 7.5 w /ft
- 3508 - 3500 K 560 lumens / ft 5.5w /ft
- 3505 - 3500 K 350 lumens / ft 3.1 w /ft

WhTu - White tuning 2700K @ 1050 lumens/foot and 6500k @1200 lumens/foot 12.5 watt/foot
 All Uplight versions with light will have a transparent diffuser
 Use of programmable drivers allow different outputs (lumen output and load) to fix color temperature versions

Mounting

- WA - Wall
- CE - Ceiling

Finish

- WH - White
- BK - Black
- CU - Custom Color
Specify RAL color
- CU Ec - End caps Custom Color
Specify RAL color. difference in costs apply
End caps black unless specified.



Dimming

- - Non dimmable 120v
- 1 - Non dimmable 277v
- 4 - Dimmable 0-10v (4wires, 120 or 277 v)

Runs

- B - 2' nominal 24 1/4"
- C - 3' nominal 34 3/4"
- D - 4' nominal 46 3/4"
- E - 5' nominal 57 1/4"
- F - 6' nominal 69 1/4"
- G - 7' nominal 79 3/4"
- H - 8' nominal 91 3/4"

Total Run: (0 ft 0 in)

Extrusions max length is 8' nominal
 Product can be adjust from nominal sizes in multiples of 1.5".
 Factory will produce submittals
 Allow 1 1/2" between modules

archlit recommends 4' max for transport

Arms Length

- A3 - 3"
- A6 - 6"
- A12 - 12"
- A18 - 18"
- A24 - 24"
- A36 - 36"
- Only ceiling mounted

Canopy



- RD - Round 4 1/4"
- SQ - Square Plate 4 1/4" x 4 1/4"

Emergency

- 00 - No Emergency
- EM - Emergency
- Specify qty only if Emergency
- Specify quantity of 4' nominal runs in runs

Notes:


- Drivers remote
- Max distance to drivers 80'
- CRI more than 90
- McAdam 3

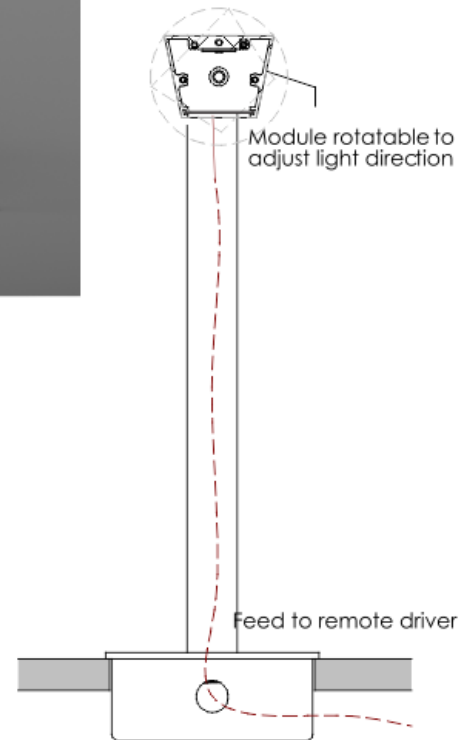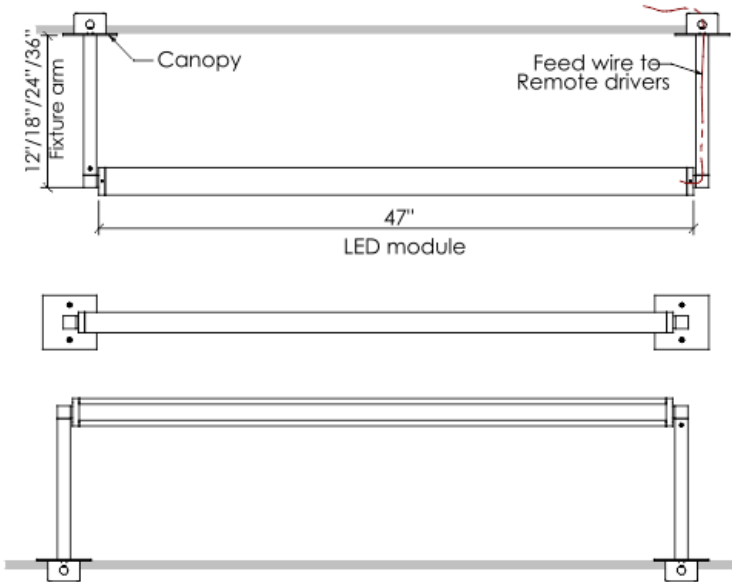




Frosted Diffuser with film hiding LED



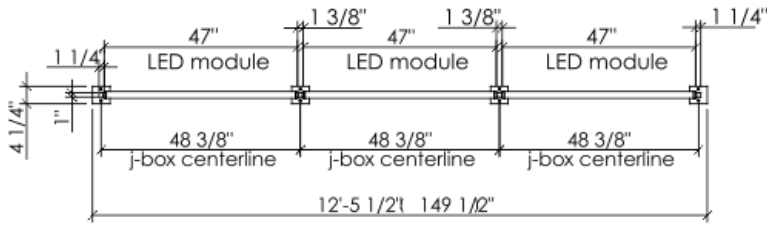

12' nominal Run

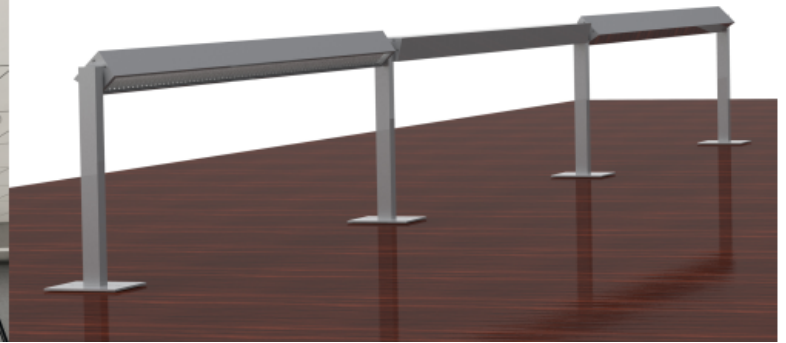



Driver boxes

archlit generates submittals for runs. size of boxes
TBD in documentation

