

archlit reserves the right to make changes without prior notice. (01.29.2024)

AnCar Slots 3, extruded aluminum minimal design lighting fixture with remote drivers (max 60' from fixture).

PowAnCar 3 Recessed Gridder-coated finish and diffuser protected with film for even illumination at highest lumen output. 960 lumens delivered per foot, 12 w/foot.

Dimmable and non dimmable. Designed for Armstrong® 9/16" Suprafine®, Silhouette®, Interlude®, AXIOM® cove, drywall and TechZone® ceiling systems by Armstrong.

Lighting module width 3.25". minimum to order 10 panels of each size or consult factory

AnCaRG

AnCar 3 Recessed Grid

AnCaRG -

Lumen Output

30HO - 3000 K 960 lumens / ft 12 w /ft

30 - 3000 K 640 lumens / ft 6 w /ft

35HO - 3500 K 960 lumens / ft 12 w /ft

35 - 3500 K 640 lumens / ft 6 w /ft

40HO - 4000 K 960 lumens / ft 12 w /ft

40 - 4000 K 640 lumens / ft 6 w /ft

Finish

WH - White

BK - Black

CU - Custom Specify RAL color

set up charges apply

Dimming

4 - Dimmable 0-10v (4wires, 120 or 277 v)

1 - Non Dimmable 277v

0 - Non Dimmable 120v

Runs

B - 2' nominal 23 3/8" LED module

C - 3' nominal 35 3/8" LED module

D - 4' nominal 47 3/8" LED module

E - 5' nominal 59 3/8" LED module

F - 6' nominal 71 3/8" LED module

G - 7' nominal 83 3/8" LED module

H - 8' nominal 95 3/8" LED module

Total Run: (0 ft 0 in)

Emergency

00 - No Emergency

EM - Emergency module max. 4'






Notes:



Drivers are Remote.max segment length 8'


Max distance to drivers 60'

CRI more than 90. McAdam 3 bin

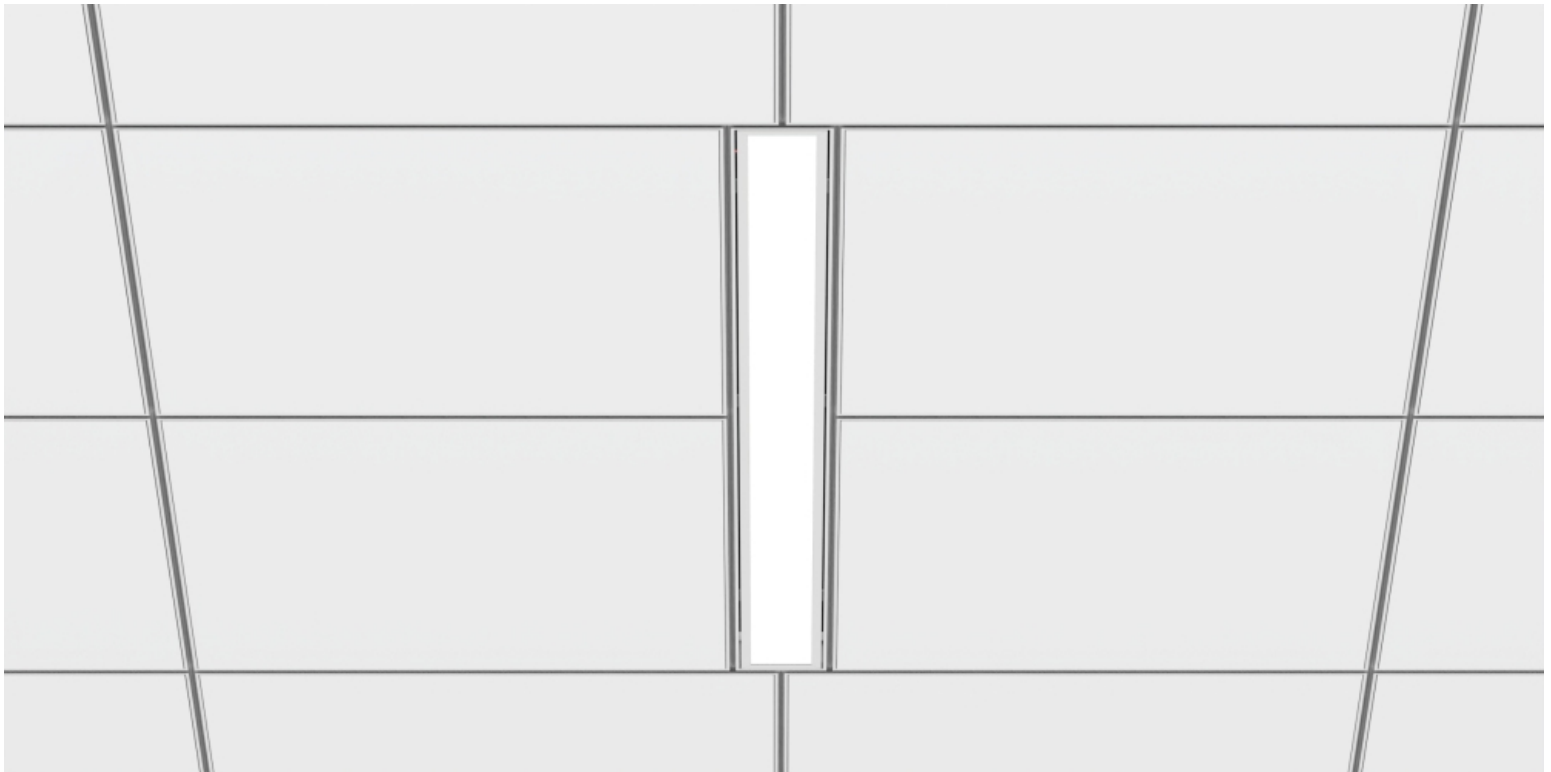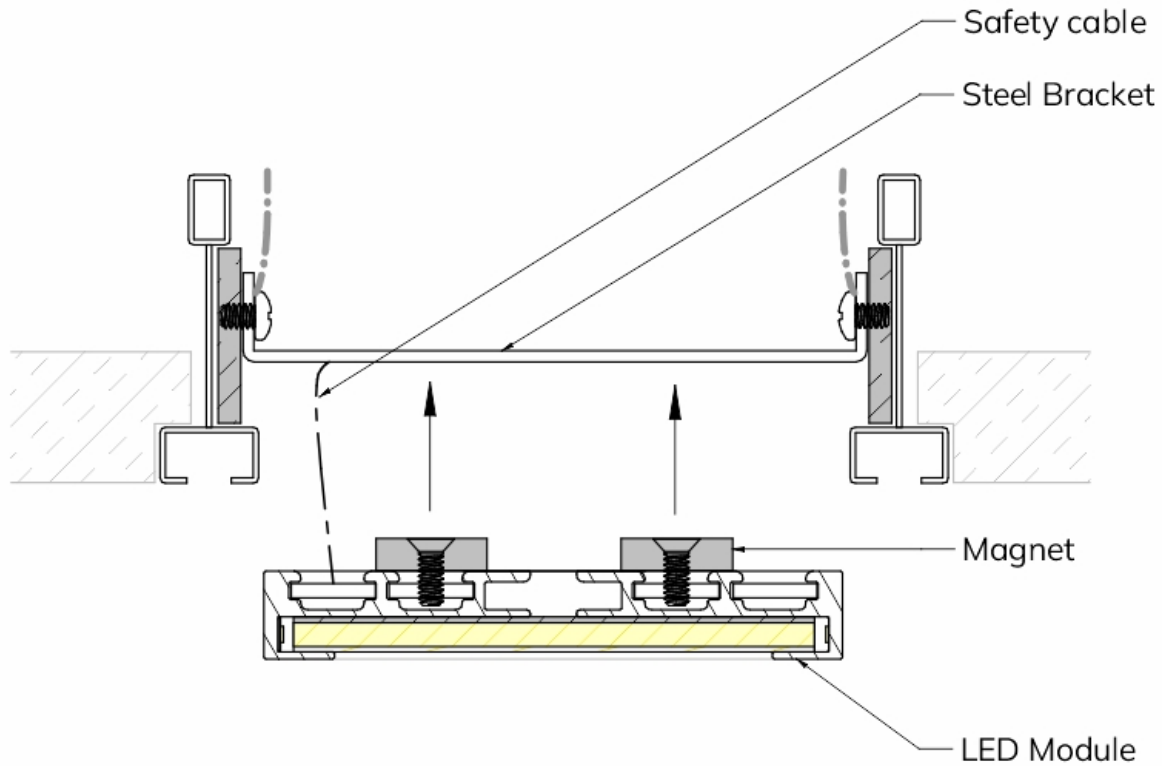

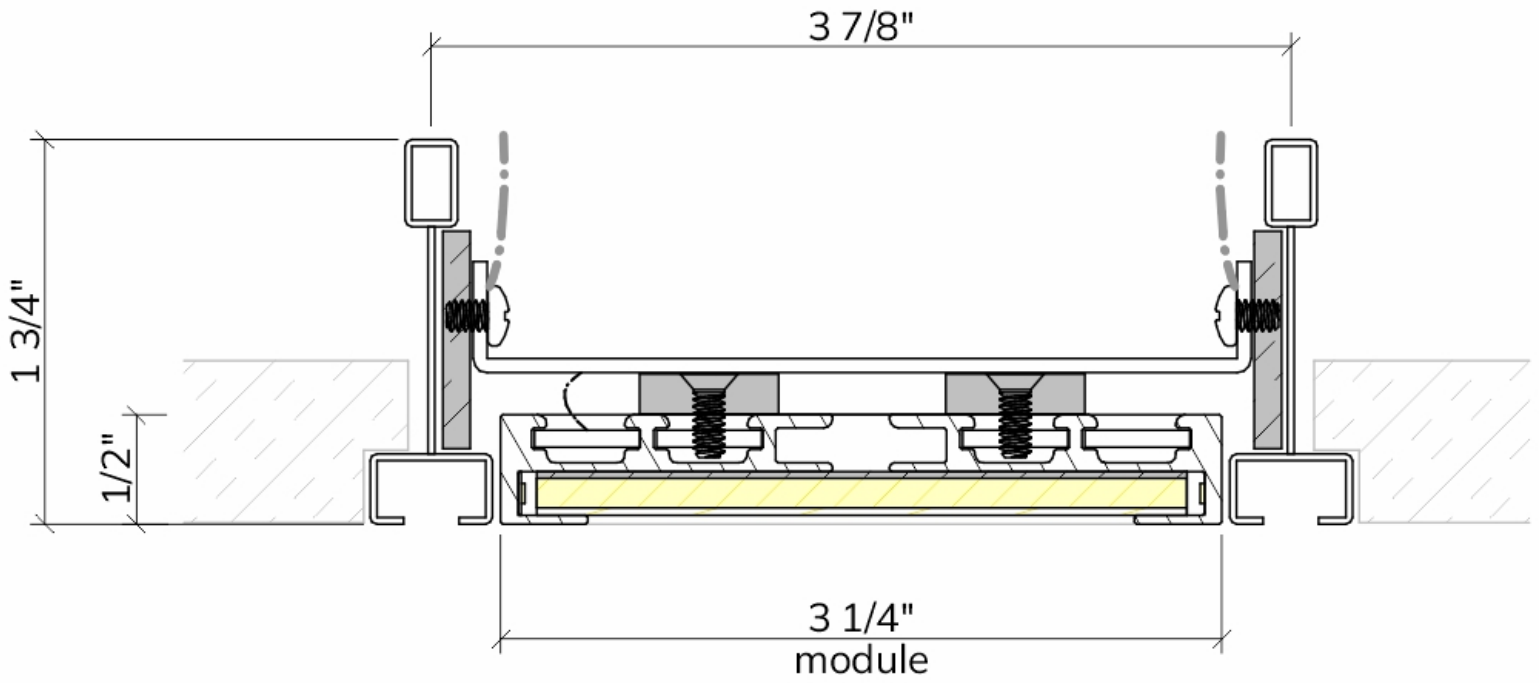

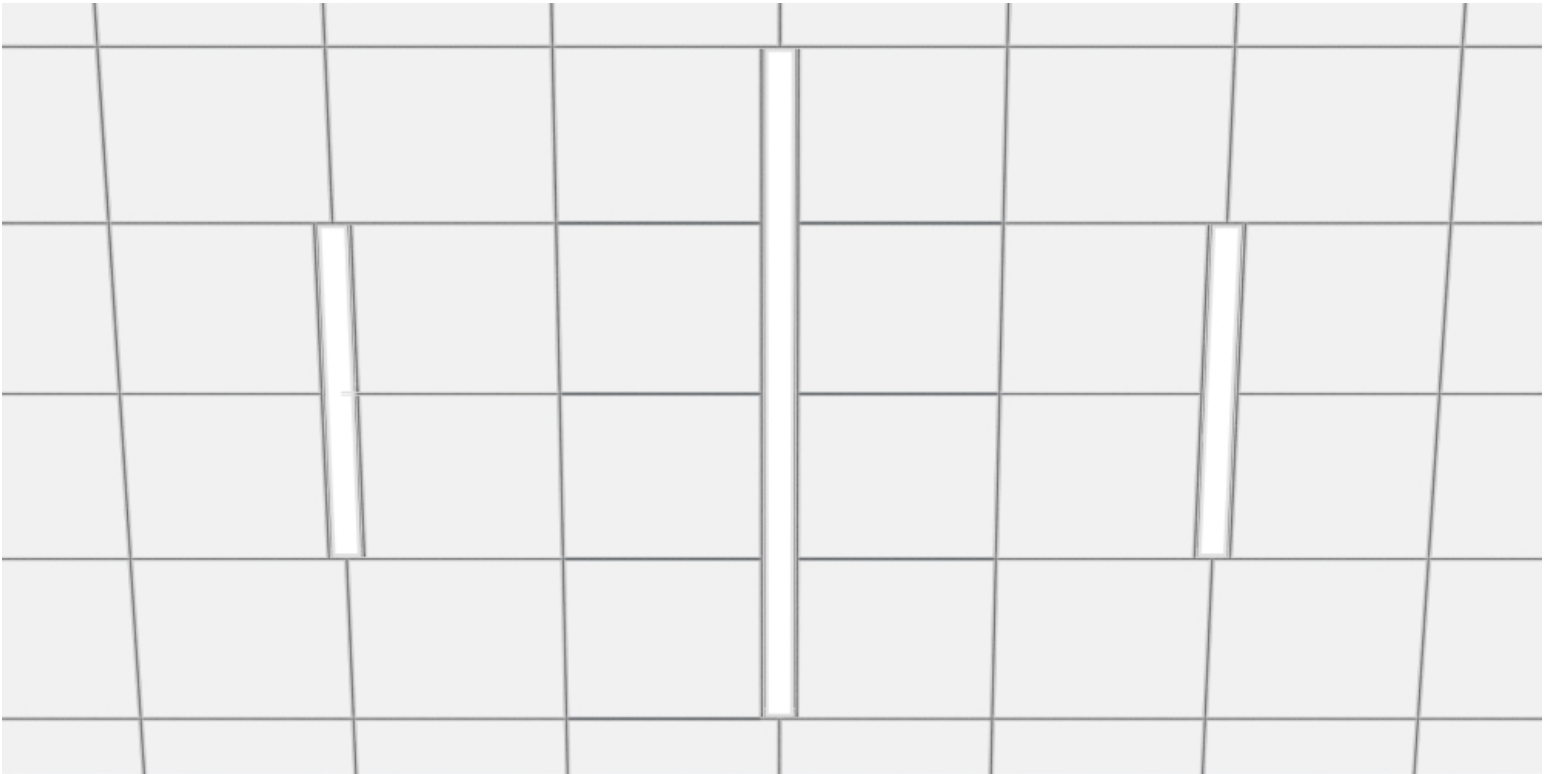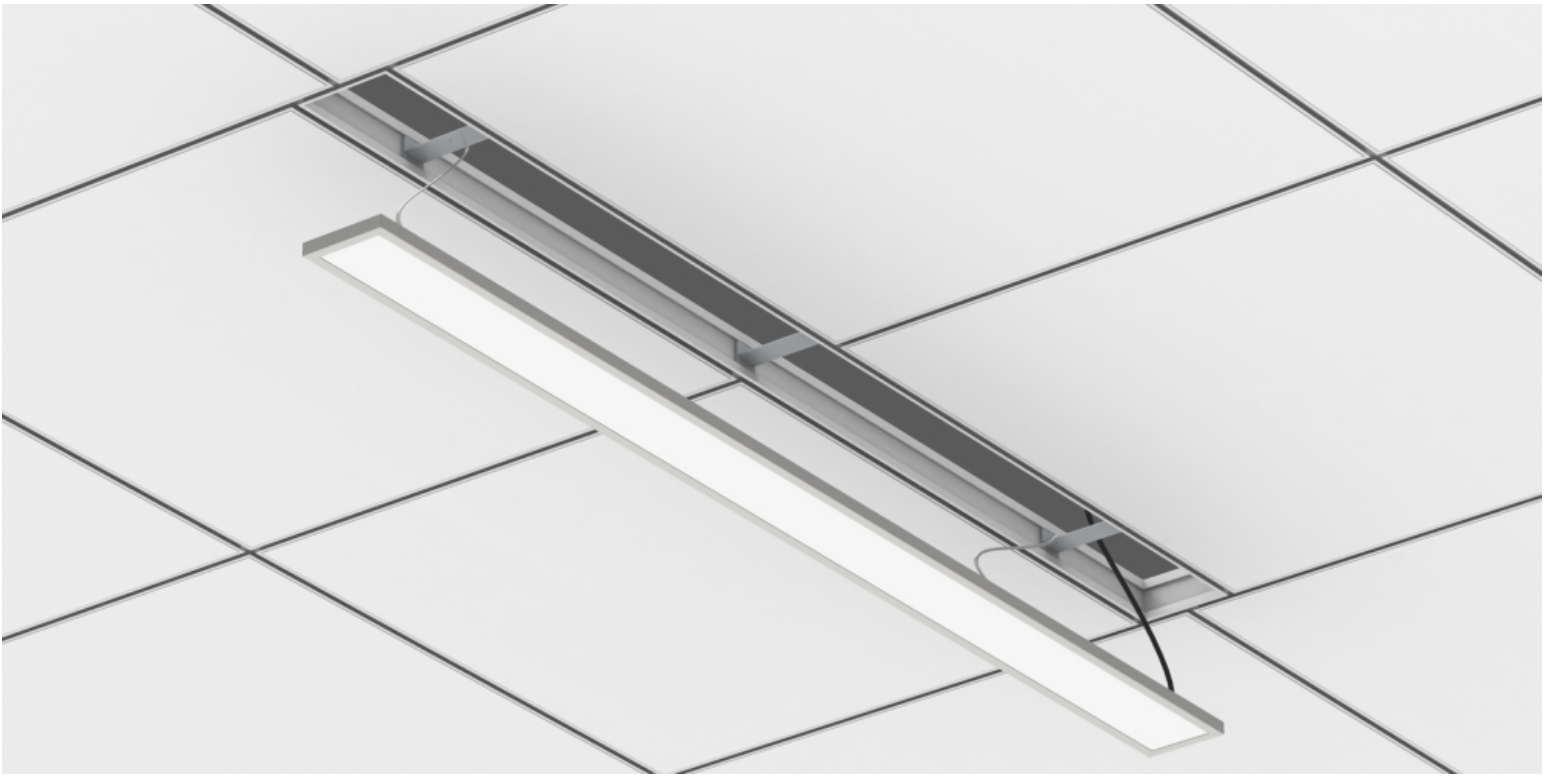

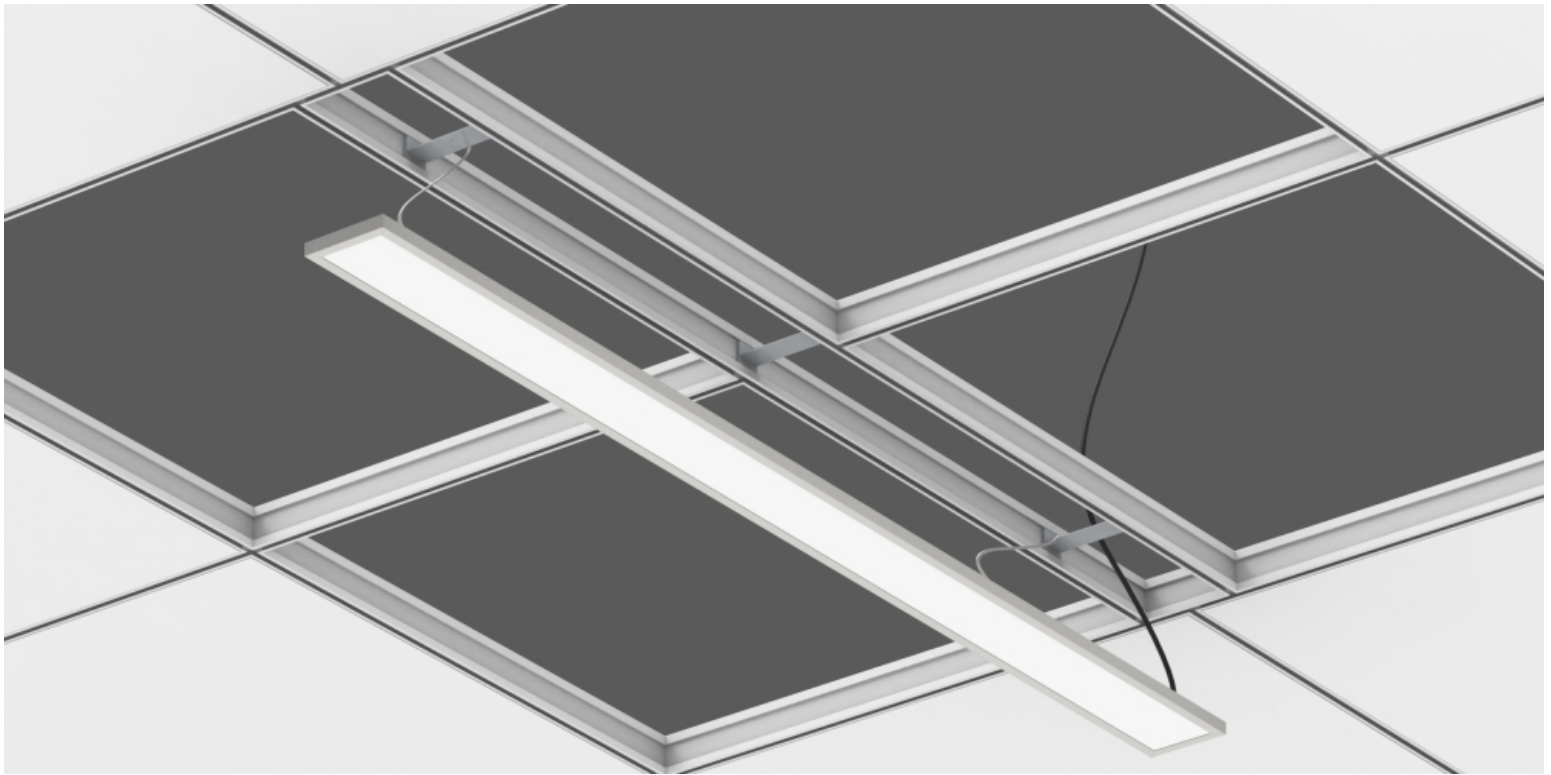

Driver Boxes

