

LeeSti Double Adagio

LeeSti / Wall/Ceiling



archlit reserves the right to make changes without prior notice. (12.28.2017)

LeeSti Double Adagio, double lighting module, extruded aluminum minimal design, 1x1 inch, remote drivers (max distance 100'). For ceiling or wall mounting, adjustable in the lighting module axis and at the canopy. Arms are the same section and can have different lengths. 3500 k, 3000 K and 2700 K with 1400 lumens and 12.5 w/foot. Dimmable and non dimmable with 0-10v and Triac drivers. Special film for LED allows a continuous and even line of light. Remote drivers. Damp Location listed.

LDA

LeeSti Double Adagio

Lumen Output

3017 - 3000 K 1200 lumens / ft 12 w /ft

3014 - 3000 K 1000 lumens / ft 10 w /ft

3011 - 3000 K 780 lumens / ft 7.5 w /ft

3008 - 3000 K 560 lumens / ft 5.5w /ft

3005 - 3000 K 350 lumens / ft 3.1 w /ft

3517 - 3500 K 1200 lumens / ft 12 w /ft

3514 - 3500 K 1000 lumens / ft 10 w /ft

3511 - 3500 K 780 lumens / ft 7.5 w /ft

3508 - 3500 K 560 lumens / ft 5.5w /ft

3505 - 3500 K 350 lumens / ft 3.1 w /ft

WhTu - White tuning 2700K @ 1050 lumens/foot

and 6500k @1200 lumens/foot 12.5 watt/foot

All Uplight versions with light will have a transparent diffuser

Use of programmable drivers allow different outputs (lumen output and load) to fix color temperature versions

Finish

WH - White

BK - Black

- Custom Color

Specify RAL color

Dimming Options

0 - Non dimmable 120V

1 - Non dimmable 277V

4 - Dimmable 0-10v (4wires, 120/277 v)

Dimmable TRIAC (2 wires, max 25w, 120v) requires more drivers if run is bigger than 2'



Lighting Modules

A - 1' nominal 12.5 w

B - 2' nominal 25 w

Arms

A3 - 3" length

A6 - 6" length

A12 - 12" length

A18 - 18" length

A24 - 24" length

Canopy

RD - Round 4" x4" Jbox

SQ - Square Plate 4"x4"

SG - Single Gang Plate

Specify RAL for custom color

Emergency

OO - No Emergency

EM - Emergency module max 24'

Specify qty if lighting module is D




Adding emergency to a 4' means (2) drivers and (2) emergency packages.

If 4' has 2' with emergency and 2' without it, will have (2) drivers and (1)


Notes:

Remote drivers

Max distance to drivers 100'

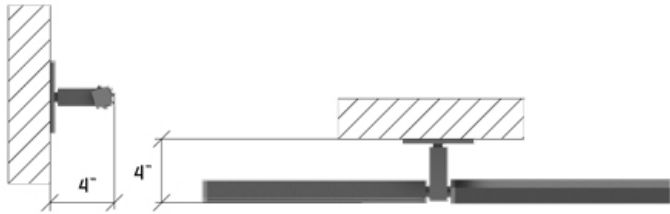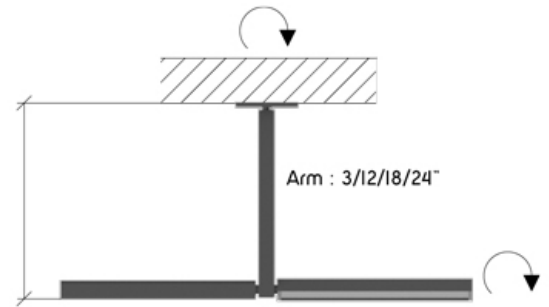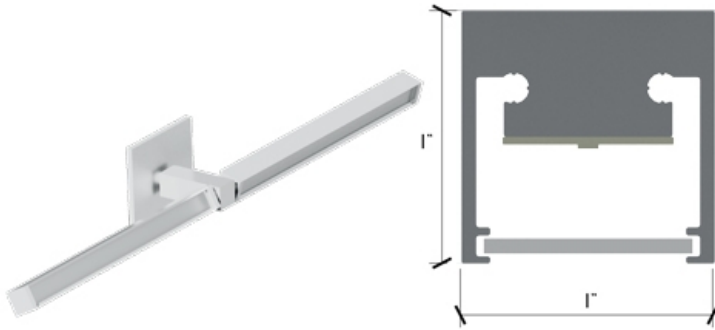


ADA

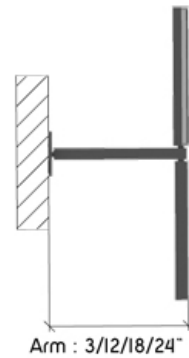




Remote Drivers

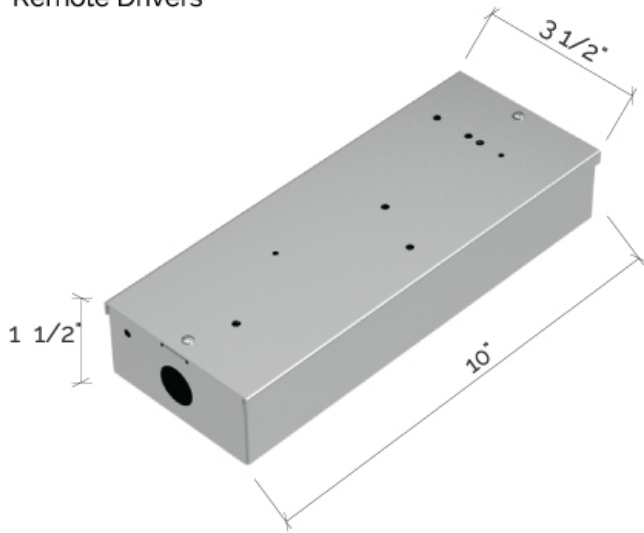

Driver Box for Dimm 0-10v
NTS

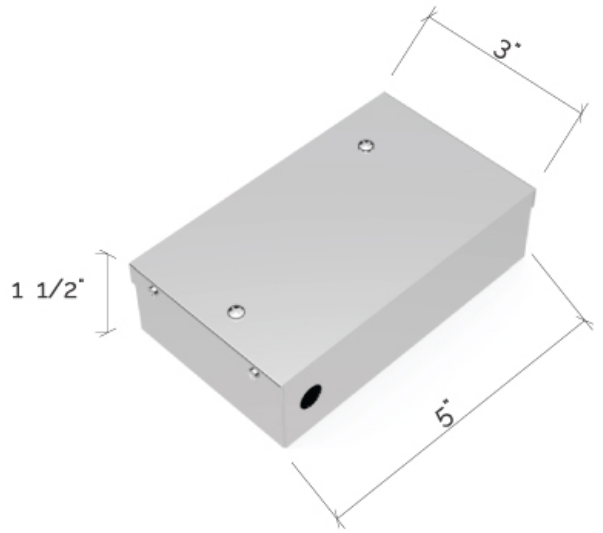

Driver Box Non Dimm and TRIAC drivers
NTS

