



archlit reserves the right to make changes without prior notice. (02.02.2017)

Surprise Recessed Trim Continuous incorporates to a drywall ceiling, with flanges at the sides of 1/2" so it can be installed on a paper finished wall. A continuous diffuser, that is field cuttable, snaps in allowing runs based on a max of 8' (max logical segments to ship and manipulate at any job site). Runs will look continuous with multiple segments aligned. Installation can be horizontal (ceiling) or vertical (walls). Special angles upon request. It can connect with Surprise Ceiling (joining a wall recessed with a surface mounted fixture of 1.75" x 1.75" that will give real illumination to the space).

Surprise Dry is a 5/8" height fixture that allow to be attached to studs. Dimmable and no dimmable versions. Only for spaces with 5/8" drywall. Can be used horizontal, vertical or angles

SRDrTM

Surprise Dry Recessed Trim

Output

3017 - 3000 K 1200 lumens / ft 12 w /ft
 3014 - 3000 K 1000 lumens / ft 10 w /ft
 3011 - 3000 K 780 lumens / ft 7.5 w /ft
 3508 - 3500 K 560 lumens / ft 5.5w /ft
 3505 - 3500 K 350 lumens / ft 3.1 w /ft
 3517 - 3500 K 1200 lumens / ft 12 w /ft
 3514 - 3500 K 1000 lumens / ft 10 w /ft
 3511 - 3500 K 780 lumens / ft 7.5 w /ft
 3008 - 3000 K 560 lumens / ft 5.5w /ft Specify RAL color
 3005 - 3000 K 350 lumens / ft 3.1 w /ft
 WhTu - White tuning 2700K @ 1050 lumens/foot and 6500k @1200 lumens/foot 12.5 watt/foot
 All Uplight versions with light will have a transparent diffuser
 Use of programmable drivers allow different outputs (lumen output and load) to fix color temperature versions

Finish

WH - White
 BK - Black
 CU - Custom Color
 Specify RAL Color

Dimming Options

O - Non Dimmable 120v
 1 - Non Dimmable 277v
 4 - Dimmable 0-10v (4wires, 120 or 277 v)



Surprise Dry Trim

Surprise / Recessed

Runs

A - 1' module

B - 2' module

C - 3' module

D - 4' module

Total Run: (0 ft 0 in)

Specify length

Runs of more than 4' can be accomplish, with modules of 1', 2', 3' and 4'


Notes:

Drivers are remote



CRI >90

MacAdam 3 bin selection


5/8" drywall required

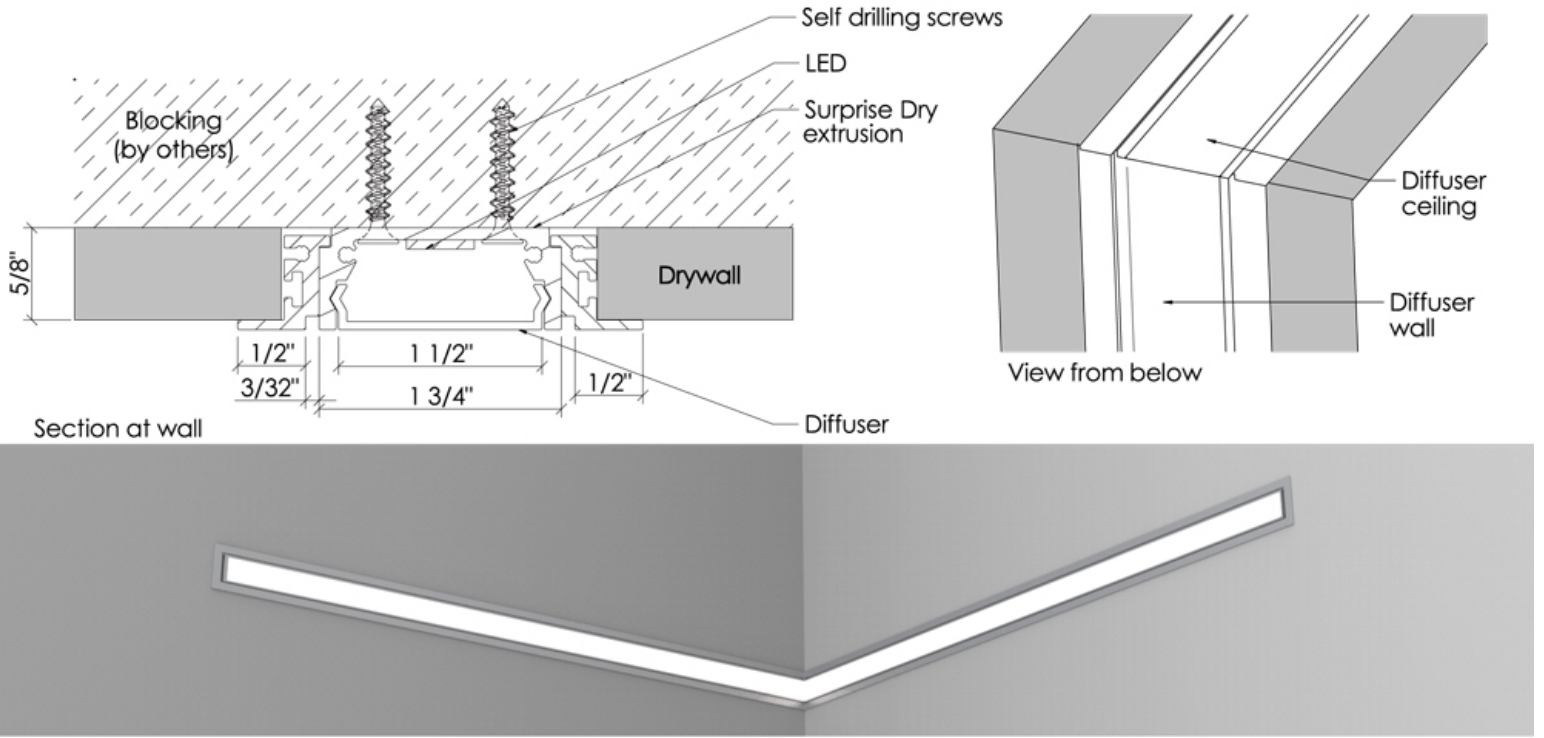


Surprise system with Surprise Dry (470 lumens/foot) and Surprise Recessed for General Lighting (1000 lumens/foot)

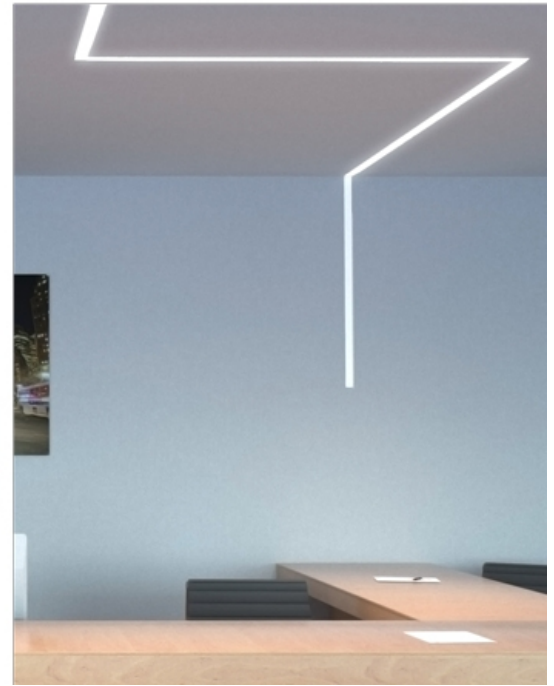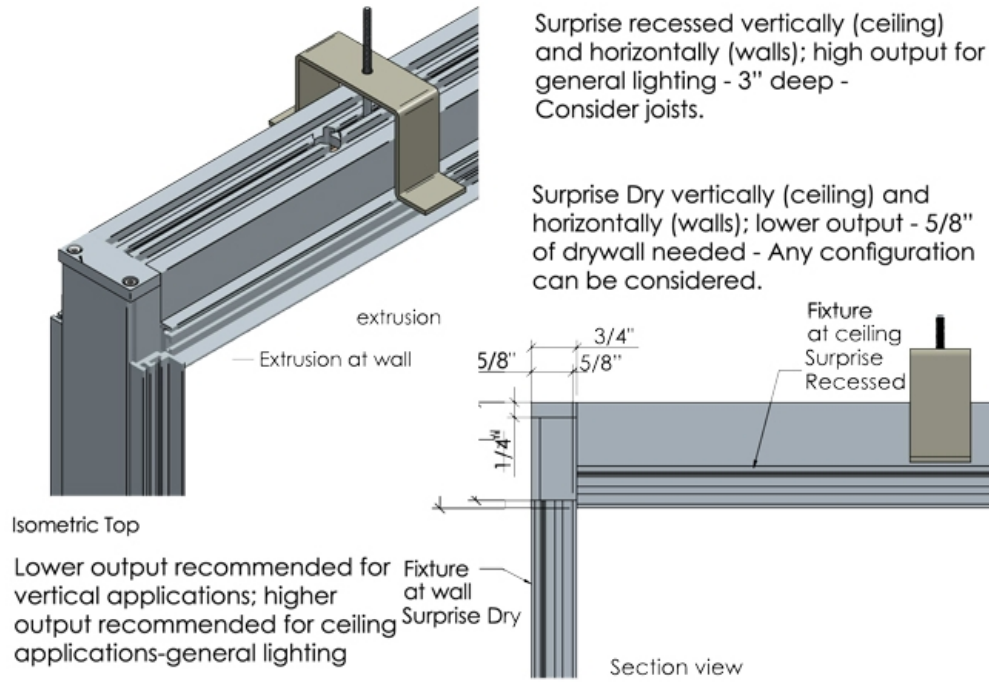

Remote Drivers

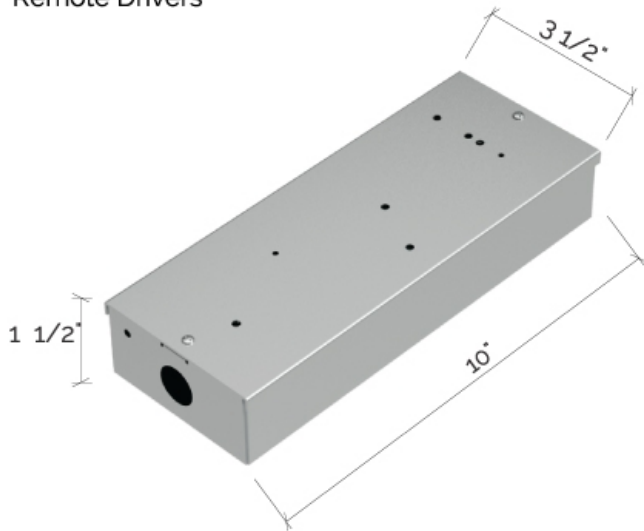

Driver Box for Dimm 0-10v
NTS

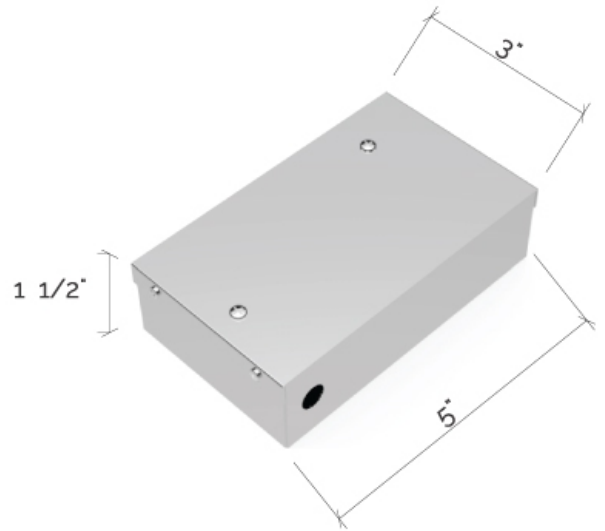

Driver Box Non Dimm and TRIAC drivers
NTS

